



# Submittal Data

MODEL  
**RXTS-121A**

Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

Reference:

### PERFORMANCE DATA

Power supply 115V, 1Ph, 60Hz

#### Cooling

Capacity	Btu/h	12000
Input	W	1140
Rated current	A	12.17
Max. Current	A	-----
CEER	Btu/w	15.0

#### Heating


Capacity	Btu/h	NA
RATED Input(Heater)	W	NA
Rated current	A	NA

### Compressor Electrical

Model	KSK89D53UEZ	
Type	ROTARY	
Brand	GMCC	
Capacity	Btu/h	10071
Input	W	712
Rated current(RLA)	A	4.85
Refrigerant type	oz	R32/13.40

### Air flow & Noise level

Indoor air flow	CFM	450/326/273
Indoor noise level	dB(A)	52/46/39
Outdoor air flow	CFM	720/634/486
Outdoor noise level	dB(A)	65/62.1/60.0
Window Opening	Min/Max Width	23/36
	Min Height	19.5

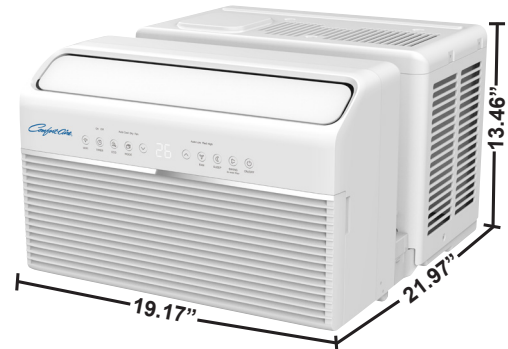

### Fan Motor

Model	ZKFP-13-8-4	
Input	W	95
Speed	RPM	1906/1483/1272

### Dimensional Data

Dimension(W*D*H)	inch	19.17x21.97x13.46
Packing (W*D*H)	inch	21.14x24.29x17.48
Net/Gross weight	lbs.	55.56/69

### SYSTEM DATA

Design pressure	PSIG	300/520
Thermostat type	Touchpad/Remote	
Application area (Cooling EPA)	300-350	

### Cord and Plug

Cord Length	ft.	5
Plug Face	Nema	LCDI(5-15P)

